

Dome Vandalproof, IR H.264 Mega IP cam



Mega Pixel Resolution offers crystal clear images & covers four times larger area than traditional CCTV cameras thereby reducing the number of cameras needed and installation costs.

KEY FEATURES

Multi Profile encoder supports H.264, MPEG & MJPEG streaming simultaneously.

H.264 Compression reduces file sizes to save on bandwidth & storage space.

Region of Interest – can stream selected video areas for saving Bandwidth.

Motion Detection can detect any suspicious movement in a specific area.


2 Way Audio supported with external speaker and microphone.

Powerful IR LEDs enhance night time viewing distance by up to 25 meters.

Built in IR Cut filter offers better quality video during day and night.

IP 66 Vandal Proof construction, compliant with IEEE 802.3af POE interface.

3GPP for 3 G mobile based remote viewing.

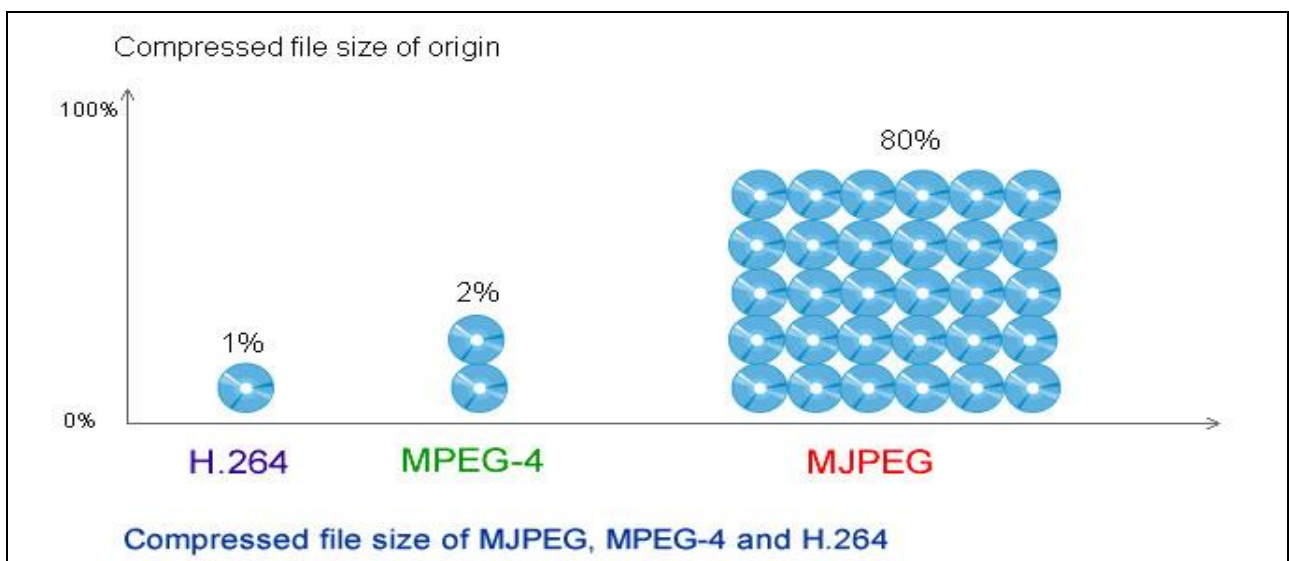

Camera	
Image Device	1 .3M Mega-pixel image sensor
Effective Pixels	1280 x 1024 pixels
Sensitivity	1.0V/lux-sec (550nm)
Signal to Noise	44dB
Lens	4-9mm Vari-focal lens
Pan & Tilt	
Preset Points	128 preset points
Camera Tour	16 tours
IP Module	
Video	
Video Encoder	H.264, MPEG4 and Motion JPEG simultaneously (Tri-encoders)
Video Profile	11 profiles simultaneously, - H.264 SXGA/ VGA / QVGA / QVGA, MPEG4 VGA / QVGA / QVGA, M-JPEG SXGA/ VGA / QVGA / QVGA
Frame Rate	Mega-pixel mode: Up to 15fps for all 11 profiles VGA mode: Up to 30fps for all 9 profiles
Image Setting	De-noise, Brightness, sharpness, contrast, Text, time and date overlay
Streaming	Simultaneously multi-profile streaming, Streaming over UDP, TCP, or HTTP, Multicast streaming-JPEG streaming over HTTP, Supports 3GPP mobile surveillance, Controllable frame rate and bandwidth Constant and variable bit rate (MPEG4 / H.264)
Audio	
Audio Encoder	RTSP: G.711 64kbps, G.726 32kbps, 3GPP: AMR
Audio Streaming	One-way or two-way
Microphone	External microphone input
Audio Output	Line level out
Network	
Supported Protocols	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DDNS, DHCP, ARP, Bonjour, UPnP, RTSP, RTP, RTCP, PPPoE, 3GPP, ICMP, SAMBA
Security	Password protection, IP address filtering, user access log
Users	20 simultaneous unicast users, Unlimited users using multicast
Ethernet	10/100M auto negotiation
System Integration	
A P I	Open API for software integration, SDK
Alarm Triggers	Intelligent video motion detection and external input
Motion Detection	10-zone video motion detection
Alarm Events	Event server: FTP server, SMTP server, Samba server. File upload video clip or snapshot .Notification via email, HTTP, and TCP .External output

	activation .Go to PTZ preset position (RS485). Audio alerting output
Video Buffer	Pre- and post- alarm buffering
General	
Power Supply	12V DC external power adapter
PoE	IEEE 802.3af
Connectors	RJ-45 10BaseT/100BaseTX, DC jack ,1 alarm input and 1 output Audio in/out, RS485
Indication LED	Two LEDs
Protection Class	IP66 outdoor use, Vandal and weather proof
Construction	3-axis mechanical design
Operating Temperature	-10°C to 50°C
Operating Humidity	20% ~ 80% (non-condensing)
Viewing System	
OS	Windows® 2000, XP, Vista
Browser	IE 6.0 or latter / Firefox 2.0 or later / Safari
Cell Phone	With 3GPP player
Video Player	VLC, Quick Time, Real Player
Software	
Search & Installation	IPWizard-2
Easy DDNS	DIPS™
Bundled NVR Program	SecuGuard 64CH Basic
Optional NVR Program	SecuGuard 64CH Pro.