



## 2N® SIP Audio Converter

Connect your Public Address with your telephone system and use it to make announcements via your phone. 2N® SIP Audio Converter converts the sound from a SIP phone system to the classic analogue form. Thanks to this you can broadcast live or pre-recorded messages over the IP network, and to any distance.



Offices and warehouses  
Health care  
Schools  
Shops

Sports facilities  
Parking and secure zones  
Government buildings  
Other public spaces

### Two-way Communicator

Use the Converter with an external speaker as a simple Public Address system or with a microphone as a two-way communicator on the principle of a simple IP intercom.

### Multicast broadcasting

Broadcast to an unlimited number of end devices, all without burdening your LAN/WAN with redundant data-streams.

### Using the IP audio features

Set up different zones, schedule the broadcasting of pre-recorded tracks or regulate the volume. The Converter can easily be connected to 2N® IP Audio Manager software and its endless possibilities.

# 2N® SIP Audio Converter

## FEATURES & BENEFITS

### Built-in relay

External devices can be controlled using the relay or you can use it as a priority switch (known as override mode).

### Powerful amplifier

2N® SIP Audio Converter can easily be connected to a speaker without needing an amplifier. One is already built-in, and has an output rating of 2x10 W.

### Calling

By connecting a microphone and a switch button you can call up to three pre-set numbers.

### Remote control

Easily adjust the volume using the remote control or via the web interface. You will find this handy especially when installing in high-up or relatively inaccessible places.

### Easy installation

You need only plug the Converter into an existing LAN/WAN network. No need of tricky programming or cabling installation.

### Simple configuration

You configure the device via a custom Web interface or by using the SW application, which saves you time, especially with larger-scale installations.


### Informacast protocol support

Thanks to support for the Informacast protocol you will be able to play back the spoken word or sound recordings from Cisco devices.

### Integration to other systems

The speaker is easily integrated into third-party systems.

## DIAGRAM

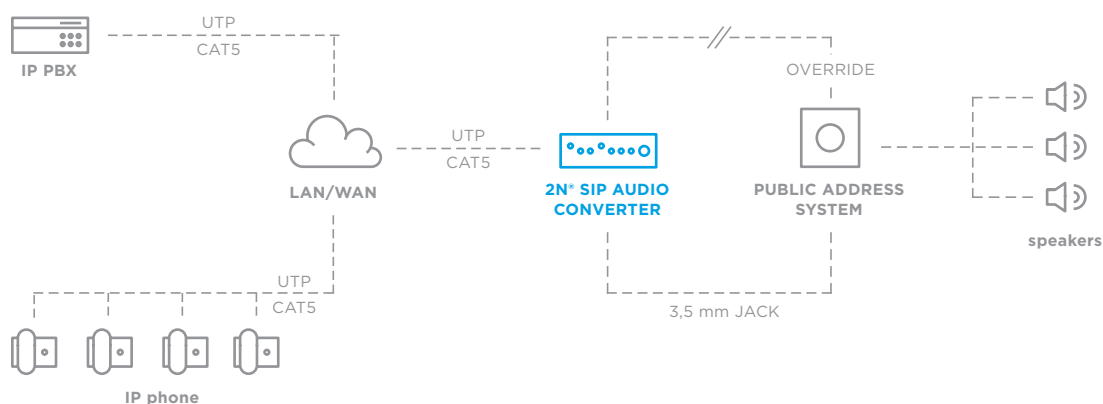

## TECHNICAL PARAMETERS

### Amplifier properties

Amplifier outputs	4x connector on the rear panel, STEREO/MONO with autodetect
Loudspeaker impedance	4-8Ω
Amplifier output	Up to 2x10 W subject to connection type
Frequency range	20Hz - 20kHz (+/- 0.5dB)
Harmonic distortion	0,05% @ 1kHz
Signal-to-noise ratio	91dB

### Interfaces

Status signalling	3x RG LED on the front panel
Local control	3x Button on the front panel
Remote control	1 x Infrared sensor on the front panel
LAN connection	RJ-45 connector on the back panel 10/100BASE-TX with Auto-MDIX function
Headphone/Line output	1x 3.5 mm STEREO jack on the front panel
Microphone/Line input	1x 3.5 mm STEREO jack on the front panel

### Power supply

Power from an external source	12V DC / 1,8A
Power over Ethernet	PoE IEEE 802.3af

### Dimensions and weight - standalone 2N® SIP Audio Converter

Dimensions	105 x 34 x 86 mm
Dimensions (with L-profiles)	130 x 34 x 86 mm
Weight	300 g

## SOFTWARE

**2N® IP Audio Manager** - application, the nerve-centre of 2N IP audio

**2N® IP Audio Control Panel** - application for controlling 2N IP audio via a computer

**2N® IP Audio Remote Control** - application for controlling 2N IP audio via a smart-phone or tablet

**2N® IP Audio Console** - allows music to be played back via any PC