

D8220 | Extreme Dome 2MP Motorized Outdoor IR Camera

www.zavio.com

ZAVIO
Innovating IP since 2006



- 1/2.8" 2MP Starlight CMOS sensor
- Motorized lens 2.8-12mm, F1.6, P-Iris
- Smart Codec + H.265
- 1080p @ 60fps
- 120dB WDR
- Smart Focus
- 40m IR range with Adaptive IR
- Built-in fan
- Operating conditions -50~ 60°C
- Anti-Scratch Glass Coating
- SD/SDHC/SDXC card slot up to 128GB
- 2 alarm in / 2 alarm out
- 12V DC & PoE (802.3af/at)
- IP67 & IK10
- ONVIF 2.4 & Profile S

ZAVIO D8220 dome camera has it all. Latest H.265 compression to cut bandwidth in half, with ZAVIO's smart codec feature further lowering bandwidth and storage consumption to 80% less than normal H.264 cameras. Class-leading WDR to handle the most challenging lighting conditions. Superior low-light sensitivity that still sees when you don't. Adaptive IR that not only automatically adjusts the power of the IR illuminators, but also it's angle, to fit the view angle of the motorized lens, which can be easily focused by the Smart Focus function. Built-in fan allowing the camera to operate in the most extreme environments (-50°C to 60°C).

The D8220 can be used in all kinds of applications, ranging from traffic, airports to public area surveillance and extreme applications. Compatible with ZAVIO CamGraba 2.0, the most professional free NVR software that can support up to 64 IP cameras.

Optional accessories

Accessory: Wall mount
Item number: AD-M03
Dimensions: 200 x 127mm
Compatible with: D8220, D8520

Wall mount




D8220 with wall mount



Features

Smart Codec + H.265

ZAVIO Smart Codec + H.265 reduces bandwidth and storage requirements by a stunning 80% compared to standard H.264 camera.

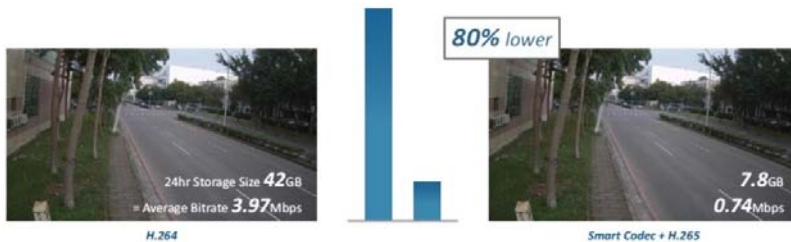

WDR off




WDR on

WDR

Cameras with WDR will take multiple exposures of the full scene and merge them together to provide an image that extends further than the human eye can perceive.

Adaptive IR

ZAVIO Adaptive IR provides 2 dimensions adaptation:
1) The angle of the IR illuminators automatically changes in sync with the camera's zoom position.
2) The brightness of the IR illuminators automatically adjusts to the scene content, effectively avoiding overexposure of objects that are too close to the camera.

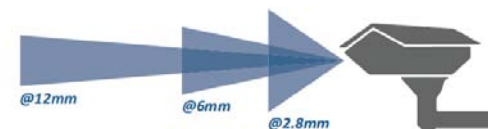

Adaptive IR: Off

Adaptive IR: On



Other Cameras

ZAVIO Starlight Cameras

Starlight

Combined with cutting-edge sensor technology, advanced noise reduction and high frame rate, Starlight cameras can capture highly detailed color images of fast moving objects even under challenging lighting conditions.

P-iris

P-iris allows objects at different distances from the camera to be focused simultaneously - providing images with better contrast, clarity, resolution and depth of field.



Conventional

P-iris

Features

High Performance IR

With a few high performance IR LEDs, the camera is able to achieve IR range of up to 40meters distance without flashlight effect. Two IR LEDs for achieving wide angle illumination and seven on each side for achieving longer distance.



Anti-Scratch Glass Coating

The hard coating makes the glass a lot more scratch-resistant, allowing installation to be less worrying.

Smart Focus control button

Smart Focus control buttons make installation much easier by allowing you to adjust the focus on site. Combined with the video output, you have everything you need to finish installation then and there.



Built-in Fan

Additional to being weatherproof (IP67), the camera also is designed with a built-in fan, allowing the camera to operate under extreme environments (-50°C to 60°C).

Technical Specifications

Camera	
Camera Type	2MP Motorized Outdoor IR Dome
Image sensor	1/2.8" CMOS sensor
Lens	Motorized 2.8-12mm, F1.6, P-iris
Horizontal view angle	104° - 33°
IR working distance	40m effective range with Adaptive IR
Min illumination	0.001 lux @ F1.6 (color) 0.0001 lux @ F1.6 (B/W)
WDR	120dB
Day/Night function	Mechanical IR cut filter, Light sensor

Video & Audio	
Resolutions	Motion JPEG/H.264/H.265: 2 Profile from 1920 x 1080 to 320 x 240 (total 5 resolutions) 2 Profile from 640 x 480 to 320 x 240 (total 3 resolutions)
Video compression	Motion JPEG H.264 baseline/ main profile/high profile H.265
Frame rate	H.265/H.264: up to 60 fps at 1920 x 1080 Motion JPEG : up to 30 fps at 1920 x 1080
Video streaming	Simultaneous Motion JPEG, H.264, H.265 Controllable frame rate and bandwidth Support unicast (Real Time Streaming Protocol)
Image settings	Rotation: mirror, flip, mirror flip, corridor mode Brightness, contrast, saturation, sharpness Overlay capabilities: time, date, text and privacy Image ROI 3D DNR Defog
Audio support	Two-way (full duplex)
Audio compression	G.711 u law, a law, G.726, AMR

I/O & Connector	
Ethernet	RJ-45 Ethernet 10/100 Base -T
Power Supply	Terminal block, 12V DC, 1.5A Power consumption: Max 14.7W PoE(Power over Ethernet) built-in IEEE 802.3af/at
Alarm I/O	Terminal block, 2/2
Audio connector	Terminal block, line in & line out
Analog video output	RCA
RS-485	Terminal block - Optional* (alarm I/O will only support 1/1)
Edge storage	SD/SDHC/SDXC up to 128GB
Buttons	Reset push button, Smart Focus control buttons
Other(s)	NTSC / PAL switch

Alarm & Event	
Input	Alarm buffer, alarm input, motion detection, audio detection, periodical, network link down.
Output	Network storage, edge storage, FTP, SMTP, HTTP event, HTTPS, alarm out pre and post event image.

Network	
Users	10 simultaneous users
Security	Multiple user access levels with password protection, HTTPS encryption
Supported protocols	IPv4, IPv6, Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP
ONVIF	2.4 & Profile S

General	
Housing	Aluminum Alloy
Ingress Protection	IP67 rated weatherproof housing
Impact Protection	IK10 rated vandalproof housing
Other(s)	Anti-Scratch Glass Coating Built-in Fan
Operating conditions	Starting temperature: -40 ~ 60°C Humidity 10-100% RH Working temperature: -50~ 60°C Humidity 10-100% RH
Dimensions(HxWxD)	φ165 x 125mm
Weight	1670g excl. power supply
Included accessories	Quick installation guide, mounting and connector kit.
Optional accessories	Wall mount
Certification	CE, FCC, RoHS
Language	Chinese, Croatian, Czech, Danish, Dutch, English, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Slovak, Spanish, Swedish, Turkish

System Requirements	
Operating system	Windows XP / 7 / 8 / 8.1, MAC OS, Linux
Browser	Internet Explorer 9 / 10 / 11, Chrome, Firefox, Safari

Software	
Video management software	ZAVIO CamGraba 2.0 IP System software, for viewing, recording and archiving up to 64 cameras.
Installation, management and maintenance	ZAVIO Installation Tool makes camera management easier with camera image preview, firmware upgrade of multiple cameras, reset cameras to default while keeping network settings, etc.

